



TEST REPORT
EN IEC 60598-1
Luminaires—Part 1: General requirements and tests
EN IEC 60598-2-1
Part 2-1: Particular requirements—Fixed general purpose Luminaires

Report Number.....: LCT-250603014785


Tested By (+signature).....: John Yang
Reviewer

Witnessed by(+ signature).....: Eric Zhang
Project Handler

Approved By (+signature).....: Arthur Chen
Approved

Date of issue.....: Jul. 02, 2025

Total number of pages.....: 53



Name of Testing Laboratory
preparing the Report.....: Shenzhen Lice Testing Technology Co., Ltd.

Applicant's name.....: Anhui Ding Ju Welding Technology Co., Ltd.

Address.....: No. 21 Guangping Road, Guangde Economic Development Zone,
Xuancheng City, Anhui Province

Manufacturer's name.....: Anhui Ding Ju Welding Technology Co., Ltd.

Address.....: No. 21 Guangping Road, Guangde Economic Development Zone,
Xuancheng City, Anhui Province

Test specification:

Standard.....: EN IEC 60598-1:2021/A11:2022;
EN IEC 60598-2-1:2021.

Test procedure.....: CE LVD

Directive.....: LVD Directive 2014/35/EU

Test Report Form No.....: IEC60598_2_1I

Master TRF.....: Dated 2024-10-18

Test item description.....: Smart mirror

Trade Mark(s): 鼎聚全球

Model/Type reference.....: 600x800mm, Diameter500, Diameter600, Diameter700,
Diameter800, 500x700, 700x1000

Ratings.....: AC 100-240V, 2A, 50-60Hz

List of Attachments (including a total number of pages in each attachment):

Attachment 1: EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES;

Attachment 2: Test report for EN IEC 62031:2020 (for LED module);

Attachment 3: Photo documentation

Summary of testing:

Tests performed (name of test and test clause):

- EN IEC 60598-1:2021/A11:2022;
- EN IEC 60598-2-1:2021.
- EN IEC 62031:2020
- EN 62493:2015/A1:2022

The LED module in product was found to comply with the requirements of IEC 62031:2018; EN IEC 62031:2020.

The submitted samples were classified as RG1 according to IEC TR 62778:2014

The submitted samples were found to comply with the requirement of IEC 62493:2015/AMD1:2022 and EN 62493:2015/A1:2022 without testing because they are LED-light-source technology

Testing location:

Shenzhen Lice Testing Technology Co., Ltd.
Room 112-113, Building B15, Yintian Industrial Zone, Yantian, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China


Summary of compliance with National Differences (List of countries addressed):

European Group

☒ **The product fulfils the requirements of EN IEC 60598-2-1:2021.**

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

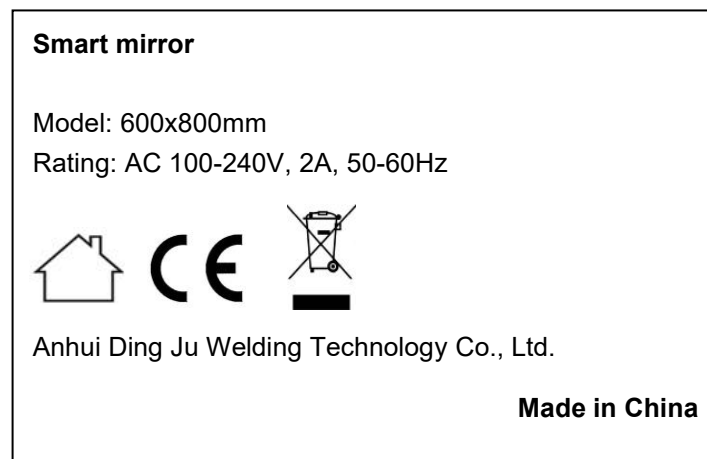**Note:**

1. The above label is draft of the artwork for marking plate pending approval by National Certification Bodies and they shall not be affixed to products prior to such approvals.
2. The height of the letters is not less than 2 mm, the height of the CE symbol is not less than 5mm, the height of the WEEE symbol is not less than 7 mm.
3. According to the EU directives which have been aligned with EU NLF (new legislative framework), both of manufacturer and importer's name and address shall be affixed on the product or, where that is not possible, on its packaging or in a document accompanying the product before the product is placed on the EU market.

Possible test case verdicts:

- test case does not apply to the test object.... : N/A or N
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement.... : F (Fail)

Testing:

Date of receipt of test item..... : 2025-06-18

Date (s) of performance of tests.....: 2025-06-18 to 2025-06-30

Equipment mobility Fixed

Operating condition..... AC connector

Class of equipment Class II

Protection against ingress of water..... IP20

Mass of equipment 3.632kg

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory.

This report is invalid if it is arbitrarily altered. The report shall be invalid without the signature of the approve. The report without the official seal or special testing seal of Shenzhen Lice Testing Technology Co., Ltd (hereinafter referred to as the unit) is invalid.

The applicant and manufacturer information, product name, model, trademark and other information in the report are provided by the applicant, and the laboratory is not responsible for verifying their authenticity.

The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.

General product information and other remarks:

1. The product is a Smart mirror which belongs to the Luminaire.
2. Unless otherwise specified, test are carried out in a draught-proof room at $(25 \pm 5) ^\circ\text{C}$.

Model Difference:

All models are the same except for the model name and appearance shape.

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.4 (0)	GENERAL TEST REQUIREMENTS		P
1.4 (0.3)	More sections applicable.....:	Yes ☐ No ☒ Section/s:	—
1.4 (0.5)	Components	(see Annex 1)	—
1.4 (0.7)	Information for luminaire design in light sources standards		—
1.4 (0.7.2)	Light source safety standard	EN IEC 62031	—
	Luminaire design in the light source safety standard		N/A
1.5 (2)	CLASSIFICATION OF LUMINAIRES		P
1.5 (2.2)	Type of protection	Class II	P
1.5 (2.3)	Degree of protection.....	IP20	—
1.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces.....:	Yes ☒ No ☐	—
1.5 (2.5)	Luminaire for normal use	Yes ☒ No ☐	—
	Luminaire for rough service	Yes ☐ No ☒	—
1.6 (3)	MARKING		P
1.6 (3.2)	Mandatory markings		P
	Position of the marking	On the enclosure	P
	Format of symbols/text		P
1.6 (3.3)	Additional information		P
	Language of instructions	English	P
1.6 (3.3.1)	Combination luminaires		N/A
1.6 (3.3.2)	Nominal frequency in Hz	50-60Hz	P
1.6 (3.3.3)	Operating temperature	35°C	P
1.6 (3.3.5)	Wiring diagram		N/A
1.6 (3.3.6)	Special conditions		N/A
1.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
1.6 (3.3.8)	Limitation for semi-luminaires		N/A
1.6 (3.3.9)	Power factor and supply current		N/A
1.6 (3.3.10)	Suitability for use indoors		P
1.6 (3.3.11)	Luminaires with remote control		N/A
1.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
1.6 (3.3.13)	Specifications of protective shields		N/A
1.6 (3.3.14)	Symbol for nature of supply	~	P
1.6 (3.3.15)	Rated current of socket outlet		N/A
1.6 (3.3.16)	Rough service luminaire		N/A
1.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	AC connector	N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
1.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
1.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
1.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non user-replaceable light sources	P
1.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
1.6 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
1.6 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
1.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
1.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
1.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P

1.7 (4)	CONSTRUCTION		P
1.7 (4.2)	Components replaceable without difficulty		P
1.7 (4.3)	Wireways smooth and free from sharp edges		P
1.7 (4.4)	Lamp holders		N/A
1.7 (4.4.1)	Integral lamp holder		N/A
1.7 (4.4.2)	Wiring connection		N/A
1.7 (4.4.3)	Lamp holder for end-to-end mounting		N/A
1.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lamp holder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lamp holder the lamp holder has not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lamp holder has not moved from its position and show no permanent deformation		N/A
1.7 (4.4.5)	Peak pulse voltage		N/A
1.7 (4.4.6)	Centre contact		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
1.7 (4.4.8)	Lamp connectors		N/A
1.7 (4.4.9)	Caps and bases correctly used		N/A
1.7 (4.4.10)	Light source for lamp holder or connection according IEC 60061 not connected another way		N/A
1.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
1.7 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
1.7 (4.7)	Terminals and supply connections		P
1.7 (4.7.1)	Contact to metal parts		N/A
1.7 (4.7.2)	Test 8 mm live conductor		P
	Test 8 mm earth conductor		N/A
1.7 (4.7.3)	Terminals for supply conductors		P
1.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		P
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		P
	- electrical test according to 15.6.3		P
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		P
1.7 (4.7.4)	Terminals other than supply connection		P
1.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
1.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
1.7 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
1.7 (4.9)	Insulating lining and sleeves		N/A
1.7 (4.9.1)	Retainment		N/A
	Method of fixing.....:		N/A
1.7 (4.9.2)	Insulated linings and sleeves:		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C).....:		N/A
1.7 (4.10)	Double or reinforced insulation		P
1.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		P
	Safe installation fixed luminaires		P
	Capacitors and switches		P
1.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
1.7 (4.10.3)	Retention of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		N/A
	- lining in lamp holder		N/A
1.7 (4.10.4)	Protective impedance device		P
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		P
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
1.7 (4.11)	Electrical connections and current-carrying parts		P
1.7 (4.11.1)	Contact pressure		P
1.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
1.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
1.7 (4.11.4)	Material of current-carrying parts		P
1.7 (4.11.5)	No contact to wood or mounting surface		P
1.7 (4.11.6)	Electro-mechanical contact systems		P
1.7 (4.12)	Screws and connections (mechanical) and glands		P
1.7 (4.12.1)	Screws not made of soft metal		P

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:	Screw for fixing plastic enclosure: 0,5Nm Screw for fixing metal enclosure: 1,2Nm	P
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
1.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
1.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lamp holder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
1.7 (4.12.5)	Screwed glands; force (Nm).....:		N/A
1.7 (4.13)	Mechanical strength		P
1.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm).....:	Translucent cover of sensor: 0,2Nm	P
	- other parts; energy (Nm).....:	Plastic enclosure/mental enclosure/translucent cover:0,35Nm	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		P
1.7 (4.13.2)	Metal parts have adequate mechanical strength		N/A
1.7 (4.13.3)	Straight test finger		N/A
1.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
1.7 (4.13.6)	Tumbling barrel		N/A
1.7 (4.14)	Suspensions, fixings and means of adjusting		P
1.7 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		P
	C) bracket arm; bending moment (Nm).....:		N/A
	D) load track- mounted luminaires		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
1.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
1.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....		N/A
	- strands broken.....		N/A
	- electric strength test afterwards		N/A
1.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
1.7 (4.14.5)	Guide pulleys		N/A
1.7 (4.14.6)	Strain on socket-outlets		N/A
1.7 (4.15)	Flammable materials		P
	- glow-wire test 650°C.....	See Test Table 1.15 (13.3.2)	P
	- spacing ≥30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
1.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
1.7 (4.16)	Luminaires for mounting on normally flammable surfaces		N/A
	No lamp control gear.....	(compliance with Section 12)	N/A
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
1.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
1.7 (4.16.2)	Thermal protection:		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
1.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
1.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
1.7 (4.18)	Resistance to corrosion		P
1.7 (4.18.1)	- rust-resistance		N/A
1.7 (4.18.2)	- season cracking in copper		N/A
1.7 (4.18.3)	- corrosion of aluminium		P
1.7 (4.19)	Ignitors compatible with ballast		N/A
1.7 (4.20)	Rough service vibration		N/A
1.7 (4.21)	Protective shield		N/A
1.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
1.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
1.7 (4.21.3)	No direct path		N/A
1.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment.....:	See Test Table 1.15 (13.3.2)	N/A
1.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
1.7 (4.23)	Semi-luminaires comply Class II		N/A
1.7 (4.24)	Photobiological hazards		P
1.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
1.7 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778	RG1	—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2...:		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
1.7 (4.26)	Short-circuit protection		N/A
1.7 (4.26.1)	Adequate means of uninsulated accessible SELV / PELV parts		N/A
1.7 (4.26.2)	Short-circuit test with test chain according 4.26.3:		N/A
	Supply source ES1 PSE		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
1.7 (4.27)	Terminal blocks with integrated screwless protective earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
1.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C) :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
1.7 (4.29)	Luminaires with non-replaceable light source		N/A
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
1.7 (4.30)	Luminaires with non-user replaceable light source		P
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		P
	At least one fixing means requiring use of tool		P
1.7 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
1.7 (4.31.1)	SELV or PELV circuits		P
	Used SELV/PELV source		P
	Voltage $\leq$ ELV		P
	Insulating of SELV/PELV circuits from LV supply		P
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		N/A
	Insulating of SELV/PELV circuits from FELV		N/A
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets have protective conductor contact		N/A
1.7 (4.31.3)	Other circuits		P
	Other circuits insulated from accessible parts according Table X.1		P
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
1.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
1.6 (4.33)	Luminaire powered via information technology communication cabling		N/A
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
1.6 (4.34)	Electromagnetic fields (EMF)		P
	No harmful electromagnetic fields		P
1.6 (4.35)	Protection against moving fan blades		N/A
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius ≥ 0.5 mm and:		N/A
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan ≤ 2 W at rated voltage		N/A
1.6 (4.36)	Track-mounted luminaires		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A

1.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
1.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II ☒ Category III ☐	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
1.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $\hat{U}_{OUT}$ and f_{UOUT} according IEC 61347-1, clause 7.1, item w	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A
1.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	P

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_P	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A

1.9 (7)	PROVISION FOR EARTHING		N/A
1.9 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance $< 0,5 \Omega$:		N/A
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		N/A
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
1.9 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		N/A
1.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
	Terminal blocks with integrated screwless earthing contacts tested according AnnexV		N/A
1.9 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
1.9 (7.2.6)	Protective earth terminal adjacent to mains terminals		N/A
1.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		N/A
1.9 (7.2.8)	Material of protective earth terminal		N/A
	Contact surface bare metal		N/A
1.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
1.9 (7.2.11)	Protective earthing core coloured green-yellow		N/A
	Length of protective earthing conductor		N/A
1.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

1.10 (14)	SCREW TERMINALS		P
	Separately approved; component list	(see Annex 1)	P
	Part of the luminaire	(see Annex 3)	N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		—
	Separately approved; component list.....:	(see Annex 1)	N/A
	Part of the luminaire.....:	(see Annex 4)	P

1.11 (5)	EXTERNAL AND INTERNAL WIRING		P
1.11 (5.2)	Supply connection and external wiring		P
1.11 (5.2.1)	Means of connection.....:		P
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
1.11 (5.2.2)	Type of cable.....:		N/A
	Nominal cross-sectional area (mm ²).....:		N/A
	Cables equal to IEC 60227 or IEC 60245		N/A
1.11 (5.2.3)	Type of attachment, X, Y or Z		N/A
1.11 (5.2.5)	Type Z not connected to screws		N/A
1.11 (5.2.6)	Cable entries:		N/A
	- suitable for introduction		N/A
	- adequate degree of protection		N/A
1.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
1.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
1.11 (5.2.9)	Locking of screwed bushings		N/A
1.11 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
1.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
1.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		N/A
1.11 (5.2.10.3)	Tests:		N/A
	- impossible to push cable; unsafe		N/A
	- pull test: 25 times; pull (N)..... :		N/A
	- torque test: torque (Nm)..... :		N/A
	- displacement ≤ 2 mm		N/A
	- no movement of conductors		N/A
	- no damage of cable or cord		N/A
	- function independent of electrical connection		N/A
1.11 (5.2.10.4)	Luminaire with/designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV ≤ 25 V RMS/60V DC		N/A
	- Ordinary Class III luminaire supplied with PELV ≤ 12 V RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage ≤ 12 V RMS/30V DC		N/A
	Pull test of 30N		N/A
1.11 (5.2.11)	External wiring passing into luminaire		P
1.11 (5.2.12)	Looping-in terminals		N/A
1.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
1.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
1.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A
1.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
1.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
1.11 (5.3)	Internal wiring		P
1.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)..... :		N/A
	- temperatures..... : (see Annex 2)		N/A
	Green- yellow for protective earth only		P
1.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm ²)..... : (see Annex 2)		P
	Insulation thickness (mm) :		P
	Extra insulation added where necessary		N/A
1.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm ²)..... : (see Annex 1)		P
1.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
1.11 (5.3.1.4)	Conductors without insulation		N/A
1.11 (5.3.1.5)	SELV/PELV current-carrying parts		P
1.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
1.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
1.11 (5.3.3)	Insulating bushings:		P

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- suitable fixed		P
	- material in bushings		P
	- material not likely to deteriorate		P
	- cables with protective sheath		P
1.11 (5.3.4)	Joints and junctions effectively insulated		P
1.11 (5.3.5)	Strain on internal wiring		N/A
1.11 (5.3.6)	Wire carriers		N/A
1.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
1.11 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		P
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	P
	No damage to luminaire wiring after test		P

1.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
1.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		P
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		N/A
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high-pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
1.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
1.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible		N/A
	- required insulation from live parts in compliance with Table X.1		N/A
			N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- glass protective shields not used as supplementary insulation		N/A
1.12 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
1.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V).....:		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	- interrupted DC voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V).....:		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	- interrupted DC voltage (V)		N/A
	Class III luminaire only for connection to SELV/PELV		N/A
1.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V).....:		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V).....:		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	One pole insulated if required		N/A
1.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
1.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.12 (8.2.6)	Covers reliably secured		P
1.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 μ F not exceed 50 V 1 min after disconnection		P
	Portable luminaire with capacitor > 0,1 μ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 μ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
1.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 1.14		—
1.13 (12.2)	Selection of lamps and ballasts		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Control gear if separate and not supplied	(Control gear used see Annex 2)	—
1.13 (12.3)	Endurance test		P
	a) mounting- position	Normal use	—
	b) test temperature (°C).....	35	—
	c) total duration (h)	240h	—
	d) supply voltage (V).....	264V	—
	d) if not equipped with control gear, constant voltage/current (V) or (A)		—
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		—
	- voltage under abnormal operation (V).....		—
	e) luminaire ceases to operate		—
	f) luminaire with constant light output function		N/A
1.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
1.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
1.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
1.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
1.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions.....		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test		Verdict
1.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions.....:		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C):		N/A
	- track-mounted luminaires		N/A
1.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
1.13 (12.7.1)	Luminaire without temperature sensing control		N/A
1.13 (12.7.1.1)	Luminaire with fluorescent lamp $\leq 70W$		N/A
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions.....:		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un.....:		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C).....:		—
	Ball-pressure test.....:	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp $> 70W$, transformer $> 10 VA$		N/A
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un.....:		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C).....:		—
	Ball-pressure test.....:	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.3)	Luminaire with short circuit proof transformers $\leq 10 VA$		N/A
	- case of abnormal conditions.....:		—
	- Components retained in place after the test		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Test with standard test finger after the test		N/A
1.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link.....:	Yes ☐ No ☐	—
	- manual reset cut-out.....:	Yes ☐ No ☐	—
	- auto reset cut-out.....:	Yes ☐ No ☐	—
	- case of abnormal conditions.....:		—
	- highest measured temperature of fixing point/ exposed part (°C):.....:		—
	Ball-pressure test:.....:	See Test Table 1.15 (13.2.1)	N/A

1.14 (9)	RESISTANCE TO DUST AND MOISTURE		P
1.14 (-)	If IP > IP 20 the order of tests as specified in clause 1.12		P
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP.....:	IP20	—
	- mounting position during test.....:		—
	- fixing screws tightened; torque (Nm).....:		—
	- tests according to clauses.....:	9.2.0 & 9.2.6	—
	- electric strength test afterwards		N/A
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	c.1) For luminaires without drain holes – no water entry		N/A
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		N/A
	e) no contact with live parts (IP 2X)	IP20	P
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
1.14 (9.3)	Humidity test 48 h		P

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
1.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ):		P
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity:		N/A
	- between current-carrying parts and mounting surface.....:	100 MΩ (required: 1 MΩ)	P
	- between current-carrying parts and metal parts of the luminaire.....:	100 MΩ (required: 1 MΩ)	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....:		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity.....:	100 MΩ (required: 2 MΩ)	P
	- between live parts and mounting surface.....:	100 MΩ (required: 4 MΩ)	P
	- between live parts and metal parts.....:		N/A
	- between live parts of different polarity through action of a switch.....:		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....:		N/A
	- Insulation bushings as described in Section 5		N/A
1.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		P
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity:		N/A
	- between current-carrying parts and mounting surface.....:	500V	P
	- between current-carrying parts and metal parts of the luminaire.....:	500V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....:		N/A
	- Insulation bushings as described in Section 5		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Other than SELV/PELV:		P
	- between live parts of different polarity..... :		N/A
	- between live parts and mounting surface.....:	1480VA	P
	- between live parts and metal parts.....:	2960VAC	P
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
1.15 (10.3)	Touch current (mA).....:	Max. 0,005mA	P
	Protective conductor current (mA).....:	Max. 0,009mA	P

1.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
1.16 (13.2.1)	Ball-pressure test..... :	See Test Table 1.16 (13.2.1)	P
1.16 (13.3.1)	Needle-flame test (10 s).....:	See Test Table 1.16 (13.3.1)	P
1.16 (13.3.2)	Glow-wire test (650°C).....:	See Test Table 1.16 (13.3.2)	P
1.16 (13.4)	Proof tracking test (IEC 60112).....:	See Test Table 1.16 (13.4)	N/A

EN IEC 60598-2-1							
Clause	Requirement + Test				Result - Remark		Verdict
1.8 (11.2)	TABLE I: Creepage distances and clearances						P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						P
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	3,0	1,5	11.1.B	3,0	2,5	11.1.A
Distance 2:	--	--	--	11.1.B	--	--	11.1.A
Distance 3:	R	>6.0	3.0	11.1.B	>6.0	5.0	11.1.A
Working voltage (V)..... :					110-240V~		—
PTI..... :					< 600 ☒ ≥ 600 ☐		—
Pulse voltage or U _P if applicable (kV) :					N/A		—
Supplementary information:							
Distance 1:between live parts of different polarity							
Distance 2: between live parts and metal enclosure							
Distance 3: between live parts and plastic enclosure							
** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.							

1.8 (11.2)	TABLE II: Creepage distances and clearances						N/A
Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages							
Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)..... :							—
Frequency if applicable (kHz)..... :							—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) :							—
Supplementary information:							
Distance 2:							
Working voltage (V)..... :							—
Frequency if applicable (kHz)..... :							—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) :							—
Supplementary information:							
Distance 3:							
Working voltage (V)..... :							—
Frequency if applicable (kHz)..... :							—

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
PTI..... :		< 600 ☐ ≥ 600 ☐	—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)			—
Supplementary information: ** Insulation type: B – Basic; S – Supplementary; R – Reinforced.			

1.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm):		2		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure	See ANNEX 1	75	0,90	
AC terminal	See ANNEX 1	125	1,30	
Supplementary information:				

1.16 (13.3.1)	TABLE: Needle-flame test				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Enclosure	See ANNEX 1	0	No	0	P
Terminal	See ANNEX 1	0	No	0	P
Supplementary information: None					

1.16 (13.3.2)	TABLE: Resistance to heat and fire - Glow wire tests				P
Object/ Part No./ Material	Manufacturer/ trademark	GWT (°C) : 650			Verdict
		t _E (s)	t _I (s)	t _R (s)	
Enclosure	See ANNEX 1	0	0	--	P
Translucent cover	See ANNEX 1	0	0	--	P
Ignition of the specified layer placed underneath the test specimen (Yes/No).....:					No
Supplementary information:					

1.16 (13.4)	TABLE: Proof tracking test				N/A
Test voltage PTI		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
--	--	--	--	--	--
Supplementary information:					

EN IEC 60598-2-1						
Clause	Requirement + Test			Result - Remark		Verdict
ANNEX 1	TABLE: Critical components information					P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED DRIVER	B	Interchangeable	FYT-A	Input: 100-240Vac 50/60Hz Output: 12VDC, 2A, 24W	IEC/EN 61347- 2-13	CB or LVD approved
LED	B	Interchangeable	Interchang eable	I _F :30mA; V _F : 2,7- 3,3V; Viewing angle:115,6°	IEC TR 62778	Tested with appliance
Plastic enclosure	B	Interchangeable	Interchang eable	V-0, min. thickness: 2.1mm, 120°C	UL 94	UL
Cover near power board	B	Interchangeable	Interchang eable	V-0, min. thickness: 0.9mm, 80°C	UL 94	UL
Primary internal wire	D	Interchangea ble	Interchang eable	2 x 0.75 mm², 2 x 0.5 mm² (not exceed 2m)	DIN EN 50525- 2-11, EN 50525-2-11	VDE
AC terminal	D	Interchangeable	Interchang eable	250Vac, 7A, 85°C, V- 0	UL 1977	UL
Secondary internal wire	D	Interchangeable	Interchang eable	Min. 300V, min. 80°C, VW-1, min. 30AWG	UL758	UL
PCB	D	Interchangeable	Interchang eable	Min. 300V, min. 80°C, VW-1, min. 30AWG	UL758	UL
Fuse	D	Interchangeable	Interchang eable	T3.15A, 250VAC	IEC/EN 60127-1 IEC/EN 60127-3	VDE
Transformer	B	Interchangeable	Interchang eable	Class B, 130°C	IEC/EN 61558- 2-16	Tested with appliance
- Bobbin	B	Chang Chun Plastics Co., Ltd	T200HF	Phenolic, V-0, 150°C, min. thickness: 0.40mm	UL 94	UL
(Alternative)	B	Interchangeable	Interchang eable	Phenolic, V-0, 150°C, min. thickness: 0.40mm	UL 94	UL
- Magnet wire	B	Shenzhen Yancheng Compound Line Co Ltd	xUEW@/1 30	130°C	UL 1446	UL
(Alternative)	B	Interchangeable	Interchang eable	Min. 130°C	UL 1446	UL
- Triple insulated wire	B	Shenzhen Kaizhong Hedong New Materials Co Ltd	TIW- B*(UL), TIW- B(VDE)	130°C	UL 2353, IEC/ENIEC 62368-1	UL, VDE

A - The component is replaceable with another one, also certified, with equivalent characteristics

B - The component is replaceable if authorised by the test house

C - Integrated component tested together with the appliance

D - Alternative component

EN IEC 60598-2-1							
Clause	Requirement + Test	Result - Remark	Verdict				
ANNEX 2	TABLE: Thermal tests of Section 12		P				
	Type reference.....:	600x800mm	—				
	Lamp used.....:	LED	—				
	Lamp control gear used.....:	-	—				
	Mounting position of luminaire.....:	Normal use	—				
	Supply wattage (W)	--	—				
	Supply current (A)	2A	—				
	Temperatures in test 1 - 4 below are corrected for ta (°C)	35°C	—				
	- abnormal operating mode.....:	--	—				
1.13 (12.4)	- test 1: rated voltage	--	—				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	100V~ x 1,06=106V~ 240V~ x 1,06=254,4V~	—				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage.....:	--	—				
	Through wiring or looping-in wiring loaded by a current of A during the test	--	—				
1.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage.....:	--	—				
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Primary internal wire	35	--	45.6	--	105	--	--
Secondary internal wire	35	--	43.4	--	80	--	--
AC terminal	35	--	46.2	--	Ref.	--	--
Internal plastic enclosure near power board	35	--	68.3	--	Ref.	--	--
T1 winding	35	--	85.9	--	110	--	--
T1 core	35	--	80.3	--	110	--	--
PCB near Q1	35	--	86.6	--	130	--	--
C1 body	35	--	47.6	--	105	--	--
C2 body	35	--	48.9	--	105		
PCB near LED	35	--	65.3	--	130		
PCB near U1	35	--	66.3	--	130		
LED module cover	35	--	63.3	--	90		
Enclosure surface inside (Plastic)	35	--	52.3	--	Ref.		

EN IEC 60598-2-1							
Clause	Requirement + Test			Result - Remark			Verdict
Enclosure surface outside (Plastic)	35	--	43.6	--	90		
Mounting surface	35	--	50.7	--	90		
Supplementary information: Max. value recorded							

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal.....:		—
	Rated current (A).....:		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²).....:		—
(14.3.3)	Conductor space (mm).....:		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread).....:	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm).....:		N/A
	Torque (Nm).....:		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N).....:		N/A
(14.4.8)	Without undue damage		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test		Verdict
ANNEX 4	Screwless terminals (part of the luminaire)		P
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal.....:	Internal DC connector (1pin/2pin/3pin/4pin)	—
	Rated current (A).....:	Tested with appliance	—
(15.3.1)	Material		P
(15.3.2)	Clamping		P
(15.3.3)	Stop		P
(15.3.4)	Unprepared conductors		P
(15.3.5)	Pressure on insulating material		P
(15.3.6)	Clear connection method		P
(15.3.7)	Clamping independently		P
(15.3.8)	Fixed in position		P
(15.3.10)	Conductor size		P
	Type of conductor		P
(15.5)	Terminals and connections for internal wiring		P
(15.5.1)	Mechanical tests		P
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:	4	P
	Insertion force not exceeding 50 N		P
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		P
	Voltage drop (mV) after 1 h (4 samples).....:	Max. 8,3mV	P
	Voltage drop of two inseparable joints		P
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:	Max. 10,5mV	P
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A

EN IEC 60598-2-1											
Clause	Requirement + Test					Result - Remark					Verdict
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N):										N/A
(15.6.3)	Electrical tests										N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1										N/A
(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
Supplementary information:											

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 60598-2-1:2020 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Luminaire Part 2: Particular requirements Section 1: Fixed general purpose luminaires			
Differences according to..... : EN IEC 60598-2-1:2021 used in conjunction with EN IEC 60598-1:2021			
TRF template used..... : IEC EE OD-2020-F2:2020, Ed. 1.1			
Annex Form No..... : EU_GD_IEC60598_2_1H			
Annex Form Originator..... : UL(Demko)			
Master Annex Form..... : 2022-04-08			
Copyright © 2018 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

	CENELEC COMMON MODIFICATIONS (EN)		
1.7 (4)	CONSTRUCTION		
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
1.11 (5)	EXTERNAL AND INTERNAL WIRING		
1.11 (5.2.2)	Cables equal to EN 50525		N/A
	Replace table 5.1 – Supply cord		N/A
1.13 (12)	ENDURANCE TESTS AND THERMAL TESTS		
1.13 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring		P

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		
(3.3)	DK: power supply cords of class I luminaires with label		N/A
(4.5.1)	DK: socket-outlets		N/A
(5.2.1)	CY, DK, FI, GB: type of plug		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N/A
	FR: Safety requirements for high buildings (Arrêté du 30 décembre 2011 portant règlement de sécurité pour la construction des immeubles de grande hauteur et leur protection contre les risques d'incendie et de panique; Section VIII; Article GH 48, Eclairage) Glow-wire test for outer parts of luminaires:		
	- 850°C for luminaires in stairways and horizontal travel paths		N/A

EN IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- 650°C for indoor luminaires		N/A
	GB: Requirements according to United Kingdom Building Regulation		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict

TEST REPORT EN 62031 LED modules for general lighting – Safety specifications
--

4	GENERAL REQUIREMENTS		—
4.2	Classification		—
	Built-in module	Yes ☐ No ☒	—
	Independent module.....	Yes ☐ No ☒	—
	Integral module	Yes ☒ No ☐	—
4.6	Independent modules comply with requirements in IEC 60598-1:2014/AMD1:2017		N/A
4.8	Modules with integrated controlgear providing SELV comply with requirements according to IEC 61347-1:2015/AMD1:2017 clause L.5 to L.11.	(see Annex 1)	N/A

6	MARKING		—
6.2	Contents of marking for built-in and for independent LED modules		N/A
	a) mark of origin		N/A
	b) model number, type reference		N/A
	c1) constant voltage module; rated supply voltage and supply frequency		N/A
	c2) constant current module; rated supply current and supply frequency		N/A
	d) rated power		N/A
	e) indication of connections, wiring diagram		N/A
	f) value of t_c and place on the module		N/A
	g) E_{thr} if required		N/A
	h) symbol for built-in modules		N/A
	i) heat transfer temperature t_d		N/A
	j) power for heat-conduction P_d		N/A
	k) working voltage for insulation		N/A
6.3	Location of marking for built-in LED modules		N/A
	- marking of a) and b) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
6.4	Location of marking for independent LED modules		N/A
	- marking of a), b), c) and f) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
6.5	Marking of integral LED modules		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	- information in 6.2 a) to g) in data sheet, leaflet or website		N/A
6.6	Durable and legibility of marking		N/A
	- marking on the LED module legible after test with water		N/A
	- marking not on the LED module legible		N/A
7	TERMINALS		—
7.1	Integral terminals		N/A
	Screw terminals comply with section 14 of IEC 60598-1	(see Annex 3)	N/A
	Screwless terminals comply with section 15 of IEC 60598-1	(see Annex 4)	N/A
7.2	Terminals other than integral terminals		N/A
	Separately approved; component list	(see Annex 2)	N/A
	Ratings suit the conditions		N/A
	Satisfy additional relevant requirements of this standard		N/A
8 (9)	EARTHING		—
- (9.1)	Provisions for protective earthing		N/A
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Test according 7.2.3 of IEC 60598-1		N/A
- (9.2)	Provision for functional earthing		N/A
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A
- (9.3)	Lamp controlgear with conductors for protective earthing by tracks on printed circuit board		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Test with a current of 25 A between earthing terminal and each of the accessible metal parts; measured resistance (Ω) at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
- (9.4)	Earthing of built-in lamp controlgear		N/A
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
- (9.5)	Earthing via independent controlgear		N/A
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm ² and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance (Ω) between earthing terminal and each of the accessible metal parts at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A

9 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		—
- (10.1)	Controlgear protected against accidental contact with live parts		N/A
- (A2)	Voltage measured with 50 k Ω	(see Annex A)	N/A
- (A3)	Voltage > 35 V peak or > 60 V d.c. or protective impedance device	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		N/A
	Adequate mechanical strength on parts providing protection		N/A
- (10.2)	Capacitors $> 0,5 \mu\text{F}$: voltage after 1 min (V): < 50 V		N/A
- (10.3)	Controlgear providing SELV		N/A
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	SELV outputs separated from earth by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1		N/A
- (10.4)	Accessible conductive parts in SELV circuits		N/A
	Output voltage under load ≤ 25 V r.m.s. or ≤ 60 V d.c.		N/A
	If output voltage > 25 V r.m.s. or > 60 V d.c.; No load output ≤ 35 V peak or ≤ 60 V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c. :		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
10 (11)	MOISTURE RESISTANCE AND INSULATION		—
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (M Ω):		P
	For basic insulation ≥ 2 M Ω :	100 M Ω	P
	For double or reinforced insulation ≥ 4 M Ω :	100 M Ω	P
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A
11 (12)	ELECTRIC STRENGTH		—
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		N/A
	Working voltage ≤ 50 V, test voltage 500 V		N/A
	Working voltage > 50 V ≤ 1000 V, test voltage (V):		P
	Basic insulation, 2U + 1000 V	1480V	P
	Supplementary insulation, 2U + 1000 V		N/A
	Double or reinforced insulation, 4U + 2000 V		N/A
	No flashover or breakdown		N/A
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
12 (14)	FAULT CONDITIONS		—
- (14.1)	When operated under fault conditions the controlgear:		N/A
	- does not emit flames or molten material		N/A
	- does not produce flammable gases		N/A
	- protection against accidental contact not impaired		N/A
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	N/A
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	N/A
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		N/A
	The insulation resistance $\geq 1 \text{ M}\Omega$		N/A
	No flammable gases		N/A
	No accessible parts have become live		N/A
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		N/A
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		—
12.2	Overpower condition		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
14 (15)	CONSTRUCTION		—
- (15.1)	Wood, cotton, silk, paper and similar fibrous material		P
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed circuits		P
	Printed circuits used as internal connections complies with clause 14		P

EN 62031			
Clause	Requirement + Test		Verdict
15 (16)	CREEPAGE DISTANCES AND CLEARANCES		—
- (16.1)	General		P
	Creepage distances and clearances according to 16.2 and 16.3		P
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P		N/A
- (16.2)	Creepage distances		P
- (16.2.2)	Minimum creepage distances for working voltages		P
	Creepage distances according to Table 7	(see appended table)	P
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A
- (16.3)	Clearances		P
- (16.3.2)	Clearances for working voltages		P
	Clearances distances according to Table 9	(see appended table)	P
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies		N/A
	Clearances distances for basic or supplementary insulation according to Table 10		N/A
	Clearances distances for reinforced insulation according to Table 11		N/A
16 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		—
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		—
(4.11)	Electrical connections		P
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P
(4.11.6)	Electro-mechanical contact systems		N/A
(4.12)	Mechanical connections and glands		N/A
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
(4.12.5)	Screwed glands; force (Nm).....:		N/A
17 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		—
- (18.1)	Ball-pressure test	See Test Table 17 (18.1)	N/A
- (18.2)	Test of printed boards	See Test Table 17 (18.2)	N/A
- (18.3)	Glow- wire test (650°C)	See Test Table 17 (18.3)	N/A
- (18.4)	Needle-flame test (10 s)	See Test Table 17 (18.4)	N/A
- (18.5)	Proof tracking test	See Test Table 17 (18.5)	N/A
18	RESISTANCE TO CORROSION		—
	Comply with requirements according 4.18 of IEC 60598-1		N/A
20	HEAT MANAGEMENT		—
20.1	General		N/A
	Fulfil clause 20 if replaceable LED module and when heat conducting thermal interface is needed.		N/A
20.2	Thermal interface material		N/A
	Thermal interface material delivered with the module if necessary		N/A
20.3	Heat protection		N/A
	Not impair safety when operated under poor heat-conduction conditions according Annex D		N/A
22	PHOTOBIOLOGICAL SAFETY		—
22.1	UV radiation		N/A
	Luminous radiation not exceed 2mW/klm		N/A
22.2	Blue light hazard		P
	Assessed according to IEC TR 62778	RG1	P
22.3	Infrared radiation		N/A
	Requirements for infrared radiation when required		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
A	ANNEX A - TESTS		—
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable		P
12 (14)	TABLE: tests of fault conditions		N/A
Part	Simulated fault		Hazard
			YES/NO
			YES/NO
			YES/NO
			YES/NO

EN 62031							
Clause	Requirement + Test				Result - Remark		Verdict
15 (16)	TABLE: clearance and creepage distance measurements (mm)						P
Applicable part of IEC 61347-1 Table 7 – 11*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	--	--	--	--	--	--	--
Working voltage (V)..... :					--		—
Frequency if applicable (kHz)..... :					--		—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)					--		—
Pulse voltage if applicable (kV)					--		—
Supplementary information: See table 1.7 (11.2) in main report of IEC 60598-2-1							
Distance 2:	--	--	--	--	--	--	--
Working voltage (V)..... :					--		—
Frequency if applicable (kHz)..... :					--		—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)					--		—
Pulse voltage if applicable (kV)					--		—
Supplementary information: --							
Distance 3:	--	--	--	--	--	--	--
Working voltage (V)..... :					--		—
Frequency if applicable (kHz)..... :					--		—
PTI..... :					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)					--		—
Pulse voltage if applicable (kV)					--		—
Supplementary information:							
** Insulation type: B – Basic; S – Supplementary; R – Reinforced							
17 (18.1)	TABLE: Ball Pressure Test of Thermoplastics						N/A
Allowed impression diameter (mm)					≤ 2mm		—
Object/ Part No./ Material		Manufacturer/ trademark		Test temperature (°C)		Impression diameter (mm)	
--		--		--		--	
Supplementary information:							

EN 62031

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

17 (18.2)	TABLE: Test of printed boards				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
--	--	--	--	--	--
Supplementary information:					

17 (18.3)	TABLE: Glow-wire test				N/A
Glow wire temperature		650°C			—
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
--	--	--	--	--	--
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No).....:					--
Supplementary information:					

17 (18.4)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
--	--	--	--	--	--
Supplementary information:					

17 (18.5)	TABLE: Proof tracking test				N/A
Test voltage PTI		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
--	--	--	--	--	--
Supplementary information:					

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
(A)	ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK		—
(A.1)	Comply with A.2 or A.3		N/A
(A.2)	Voltage ≤ 35 V peak or ≤ 60 V d.c. :		N/A
(A.3)	If voltage measured according Clause A.2 exceeds the limit value; touch current does not exceed 0,7 mA (peak) or 2 mA d.c. :		N/A
	Comply with Annex G.2 of IEC 60598-1		N/A
ANNEX 1	LED MODULES WITH INTEGRAL CONTROLGEAR PROVIDING SELV		—
(L.5)	Protection against electric shock		N/A
	Comply with 9.2 of IEC 61558-1		N/A
(L.6)	Heating		N/A
	No excessive temperatures in normal use		N/A
	Value if capacitor tc marked :		—
	Winding insulation classified as Class :		—
	Comply with tests of clause 14 of IEC 61558-1 with adjustments		N/A
(L.7)	Short-circuit and overload protection		N/A
	Comply with tests of clause 15 of IEC 61558-1 with adjustments		N/A
(L.8)	Insulation resistance and electric strength		N/A
(L.8.1)	Conditioned 48 h between 91 % and 95 %		N/A
(L.8.2)	Insulation resistance		N/A
	Between input- and output circuits not less than 5 M Ω :		N/A
	Between metal parts of class II convertors which are separated from live parts by basic insulation only and the body not less than 5 M Ω :		N/A
	Between metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 M Ω :		N/A
(L.8.3)	Electric strength		N/A
	1) Between live parts of input circuits and live parts of output circuits :		N/A
	2) Over basic or supplementary insulation between:		N/A
	a) live parts having different polarity :		N/A
	b) live parts and body if intended to be connected to protective earth :		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord :		N/A

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	d) live parts and an intermediate metal part		N/A
	e) intermediate metal parts and the body		N/A
	f) each input circuit and all other input circuits		N/A
	3) Over reinforced insulation between the body and live parts		N/A
(L.9)	Construction		N/A
(L.9.1)	Transformer comply with 19.12 of IEC 61558-1 and 19 of IEC 61558-2-6		N/A
	HF transformer comply with 19 of IEC 61558-2-16		N/A
(L.10)	Components		N/A
	Protective devices comply with 20.6 – 20.11 of IEC 61558-1		N/A
(L.11)	Creepage distances, clearances and distances through insulation		N/A
	Creepage distances and clearances not less than in Clause 16		N/A
	Distance through insulation according Table L.5 in IEC 61347-1		N/A
	1) Basic distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—
	2) Supplementary distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—
	3) Reinforced distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—

EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Critical components information					P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
See 'ANNEX 1 TABLE: Critical components information' in main report of IEC 60598-2-1 for details.						
Supplementary information:						
¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.						
The codes above have the following meaning:						
A - The component is replaceable with another one, also certified, with equivalent characteristics						
B - The component is replaceable if authorised by the test house						
C - Integrated component tested together with the appliance						
D - Alternative component						

ANNEX 3	Screw terminals (part of the luminaire)		—
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		—
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)..... :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)..... :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)..... :		N/A
(14.4.8)	Without undue damage		N/A

EN 62031			
Clause	Requirement + Test		Verdict
ANNEX 4	Screwless terminals (part of the luminaire)		—
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal.....:		—
	Rated current (A).....:		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5.1)	Terminals internal wiring		N/A
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:	4N	N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples).....:		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
(15.6.2)	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A

EN 62031											
Clause	Requirement + Test						Result - Remark				Verdict
(15.6.3)	Electrical tests										N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1										N/A
(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV).....:						--				—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV).....:						--				—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV).....:						--				—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV).....:						--				—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
Supplementary information:											

Photo 1 Appearance of EUT

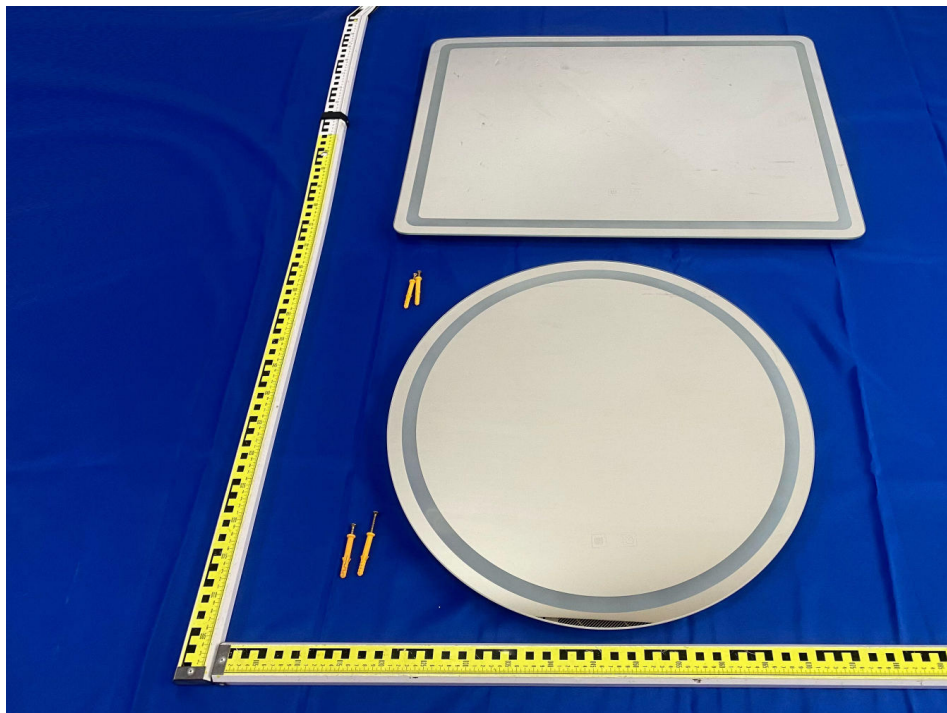


Photo 2 Appearance of EUT

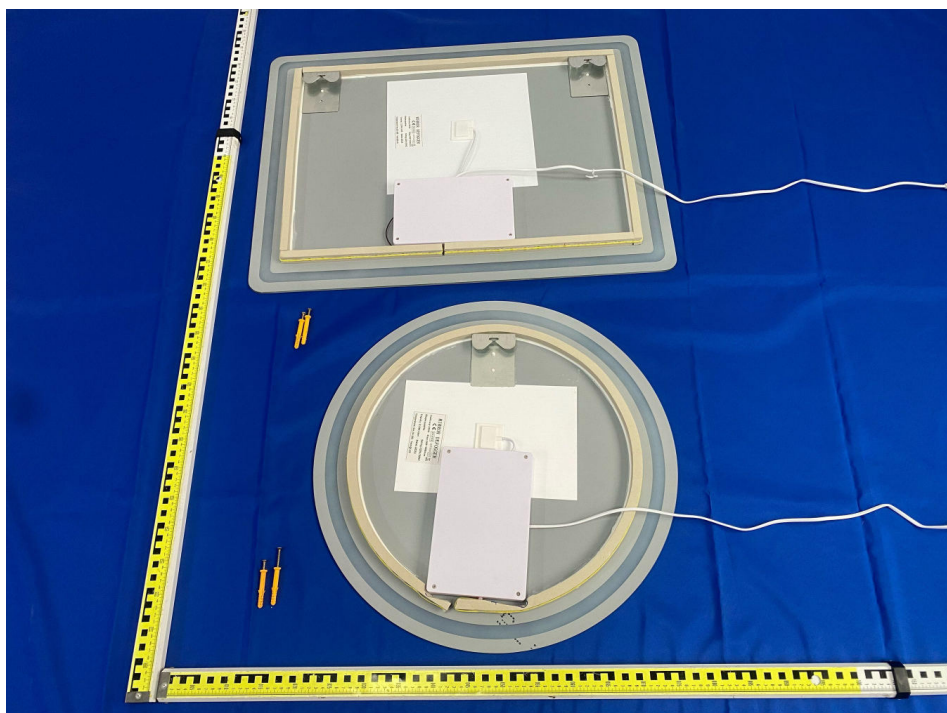


Photo 3 Appearance of EUT

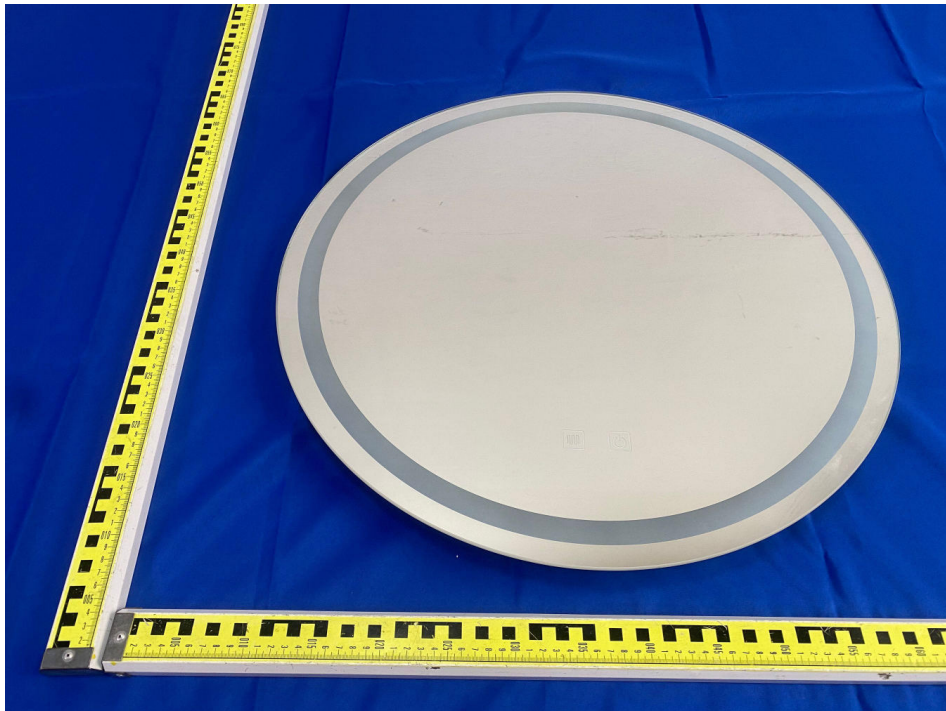


Photo 4 Appearance of EUT

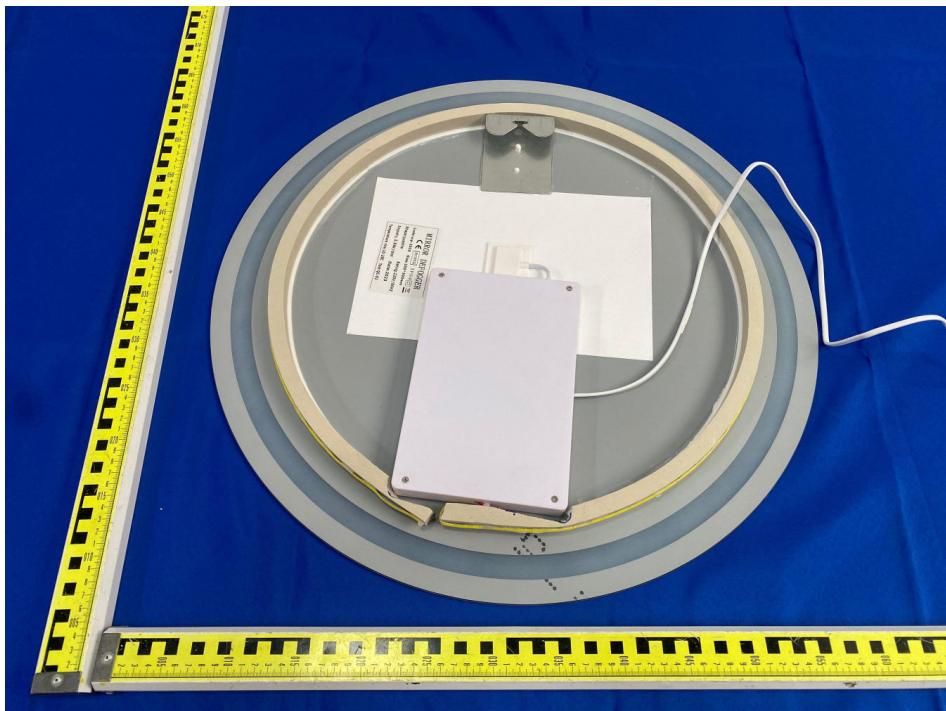


Photo 5 Inside of EUT

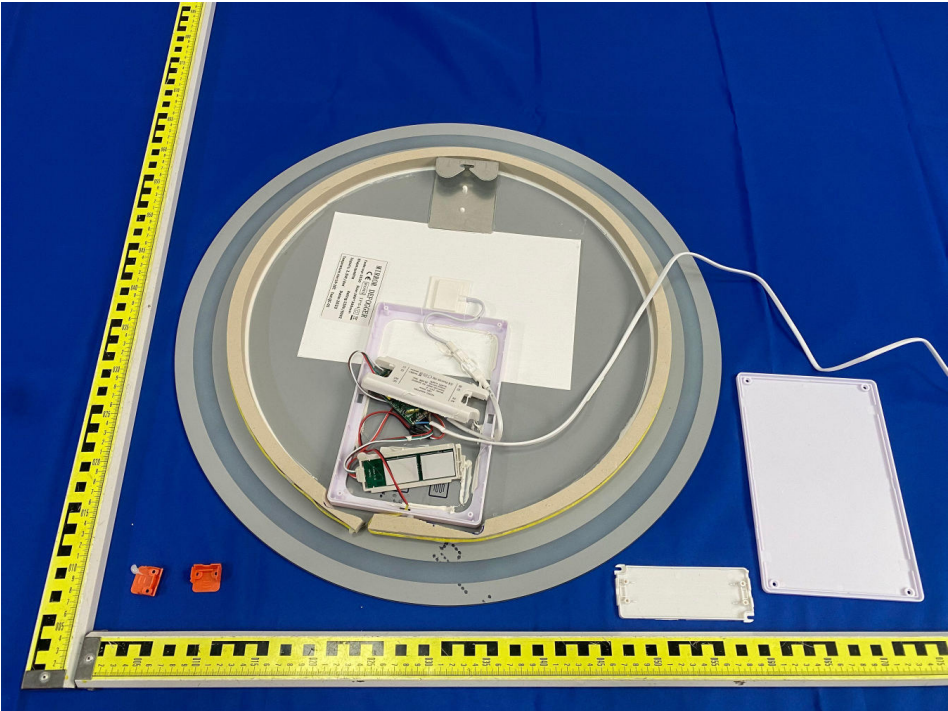


Photo 6 Appearance of PCB


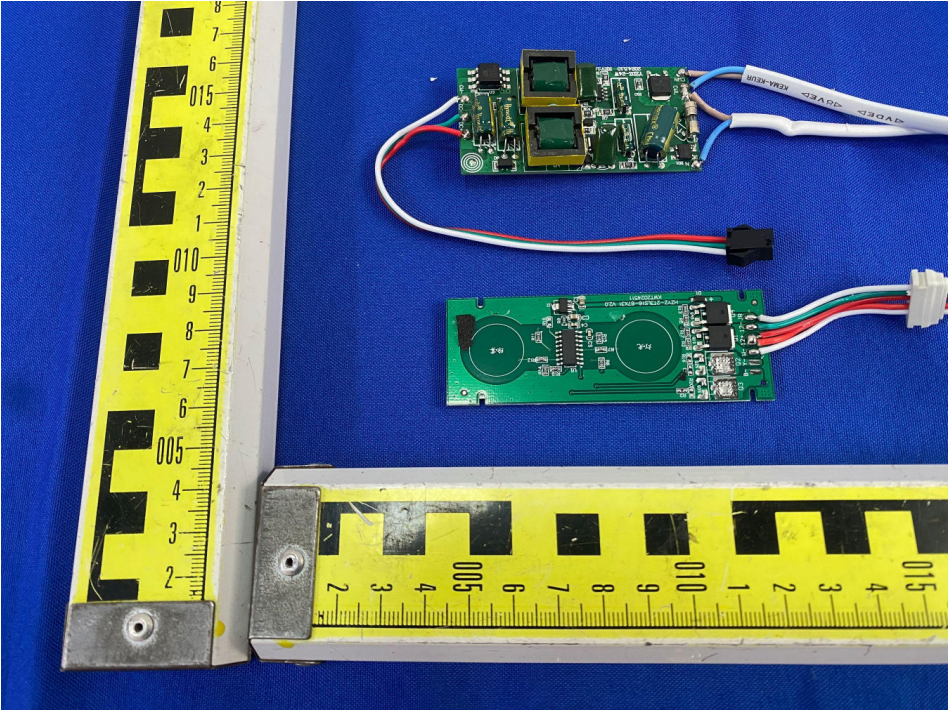


Photo 7 Appearance of PCB

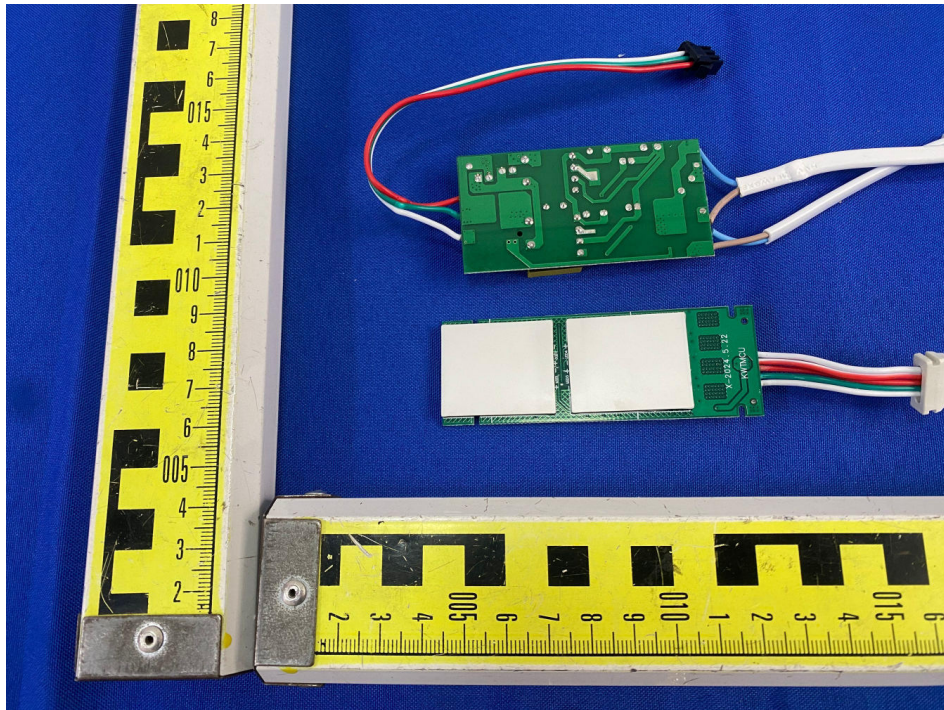

END OF REPORT